

GEODETTIC SURVEY OF N.S.W.

CENTRAL MAPPING AUTHORITY


GEODETTIC STATION RECONNAISSANCE and MAINTENANCE REPORT

STATION: *Barnet* No.: *746*

MAP SHEET SCALE 1:250 000
 INSPECTED BY: *P.K. Barnette* DATE: *June 1979*

AUTHORITY: *C.M.A.* FIELD BOOK:

- Description:
- Cleared by lanes bearing.....
Note: Cross out word or words which do not apply
 from Trig. Mast
 - Mast & Vanes have been painted white & black respectively.
 - The station/pillar was ~~unpiled~~ ~~not unpiled~~ ~~constructed on~~ ~~.....m. above~~ ~~.....m. below~~, ~~dimensions now being~~
Mast is curv of rocks found
 - Description of mark.....should be explicit, e.g., S/Steel Pillar Plate, Steel plug, Brass plug, Bolt, G.I. Pipe
 Height of mark.....m. ^{above} rock/concrete; Mark is.....m. ^{above} G. L.
 Height of Top Vanes to Top Mark/Pillar platem. Diameter of Vanes (vertical).....m.
 Height of Cairn.....m. Diameter of Cairn.....m. Name Plate found/not found/placed,
 Length of Mastm. (approximate if not unpiled)
 - A.....set in conc/rock has been placed/found, bearing.....° M from Mast/Plug/Pillar
 - A.....set in conc/rock has been placed/found, bearing.....° M from Mast/Plug/Pillar
 - A.....set in conc/rock has been placed/found, bearing.....° M from Mast/Plug/Pillar
 - A.....set in conc/rock has been placed/found, bearing.....° M from Mast/Plug/Pillar
 - Action required: *1 days clearing Beacon rods to be replaced*

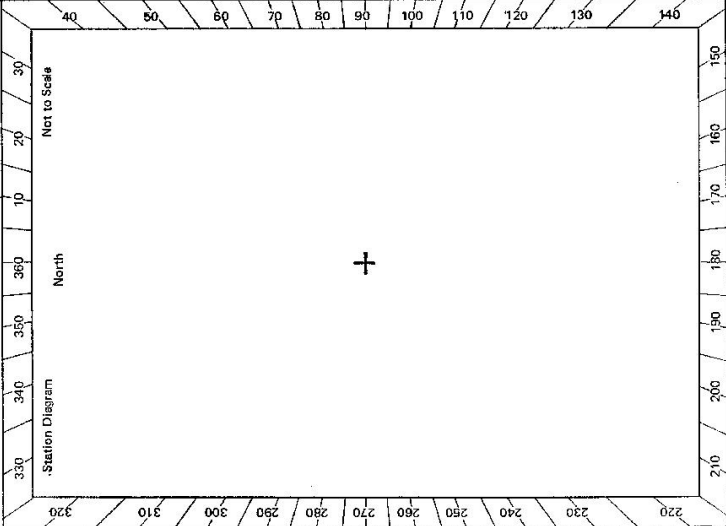

STANDPOINT:

Mark	Direction	Horiz. Distance	Height Difference	Mark	Direction	Horiz. Distance	Height Difference
			above standpt.				below standpt.
			below				above standpt.
			above standpt.				below standpt.
			below				above standpt.
			above standpt.				below standpt.
			below				above standpt.
			above standpt.				below standpt.
			below				above standpt.
			above standpt.				below standpt.
			below				above standpt.

Noted on U.T.M. Card

Prepared by: *P.K. Barnette 14/6/79* Checked:

